


RHPS 系列调压阀

减压型调压阀

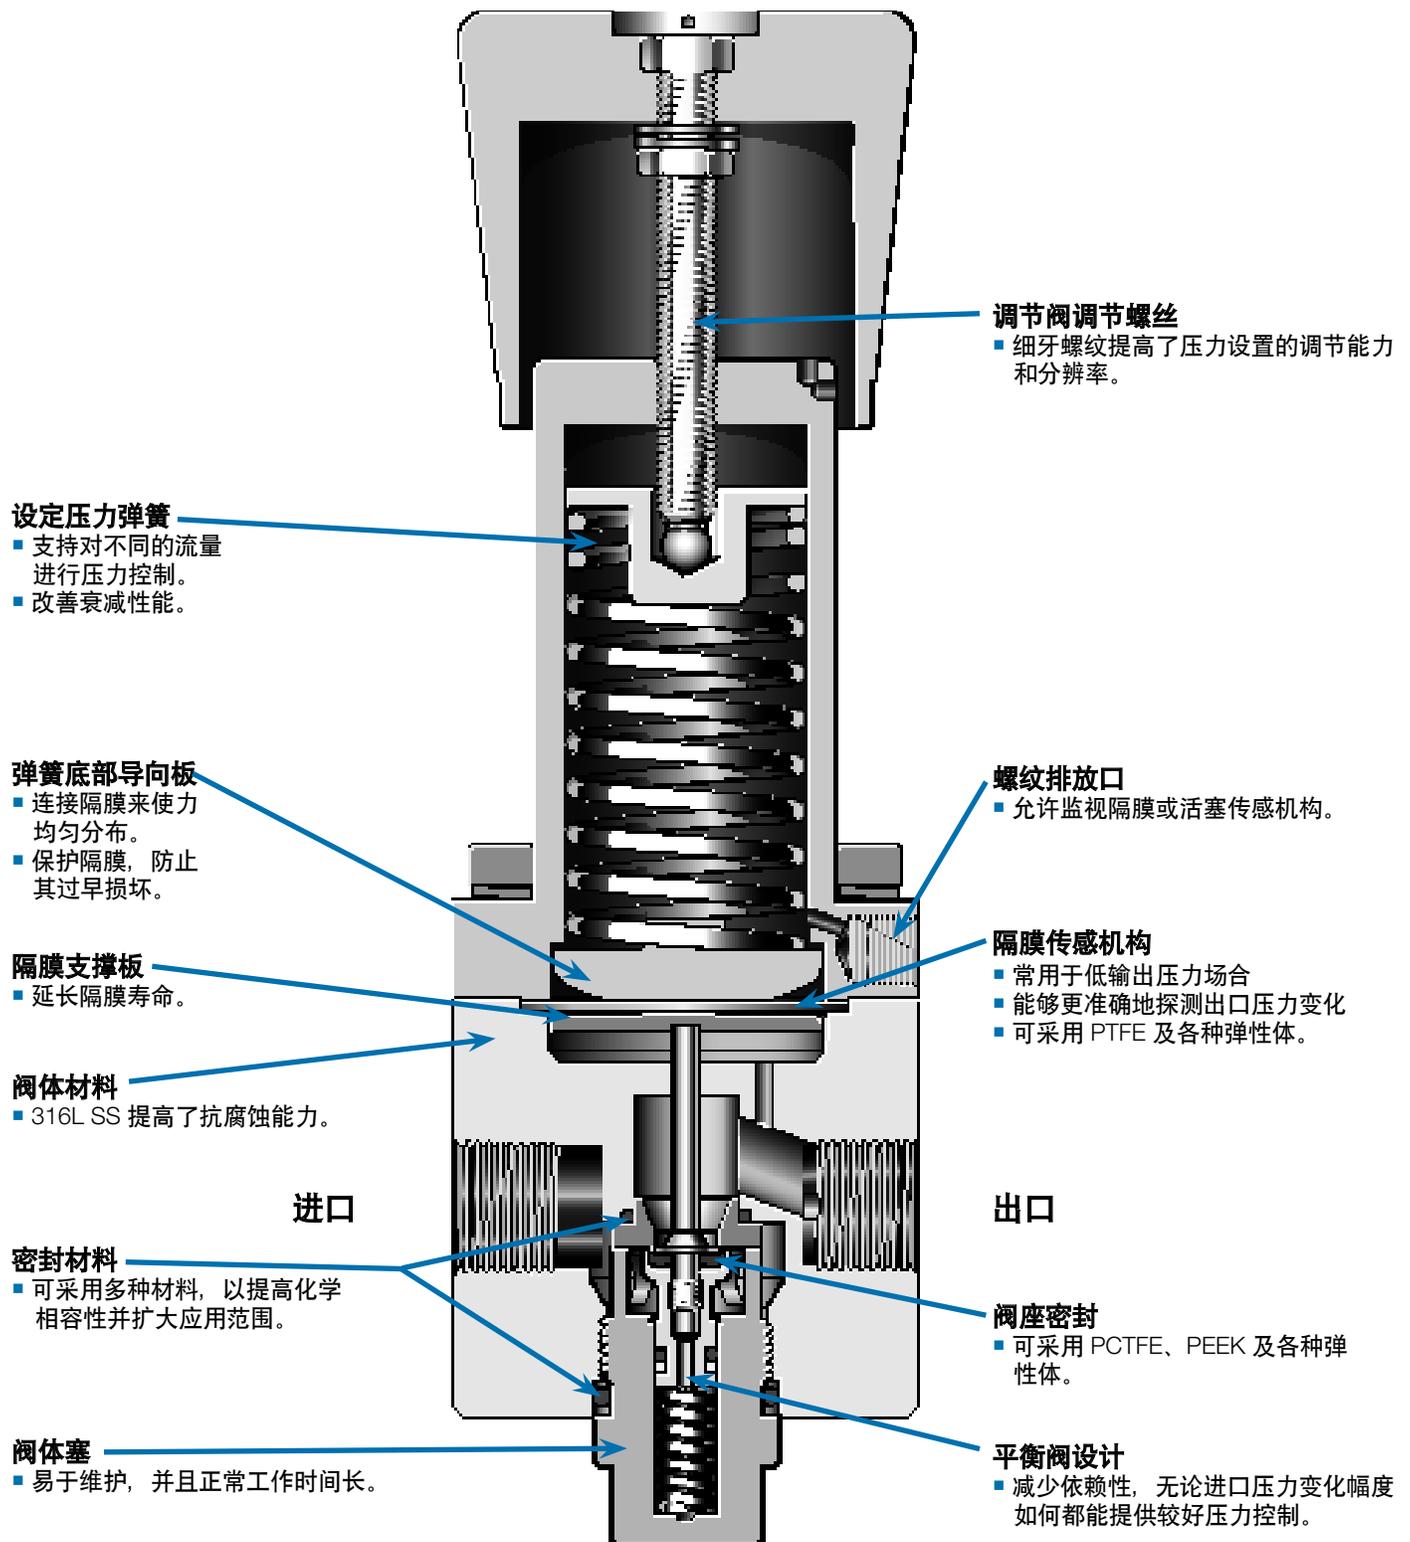

Swagelok

RHPS 系列调压阀

减压

弹簧加载—RS 系列和圆顶加载—RD 系列
针对选定系列, 进口和控制压力
达 5800 psig (400 bar) 。



RS(H)2
1/4 in.
C_v 0.05



RS(H)4, 6, 8
1/2, 3/4 和 1 in.
C_v 1.95



RS(H)10, 15, 20
1, 1 1/2 和 2 in.
C_v 3.84, 7.3, 13



LRS(H)4
1/2 in.
C_v 0.1, 0.73



LPRS4, 6, 8
1/2, 3/4 和 1 in.
C_v 1.95



LPRS10 和 15
1 和 1 1/2 in.
C_v 3.84, 7.3



RD2
1/4 in.
C_v 0.1



RD(H)6, 8
3/4 和 1 in.
C_v 1.95, 2.07



RD(H)10
1 in.
C_v 3.79



RD(H)6 DP
3/4 in.
C_v 1.95



RA4, 6, 8
(空气加载)
1/2, 3/4 和 1 in.
C_v 1.95



RD(H)15, 20
1 1/2 和 2 in.
C_v 7.3, 13



RD(H)F25, 30, 40
2 1/2, 3, 和
4 in.
C_v 21, 36, 73



LPRD20, 25,
30, 40
2, 2 1/2, 3
和 4 in.
C_v 13, 21,
36, 73

背压型:

弹簧加载 -BS 系列和圆顶加载 -BD 系列
针对选定系列, 进口和控制压力
达 5800 psig (400 bar) 。



BS(H)2
1/4 in.
C_v 0.10



BS(H)4, 6, 8
1/2, 3/4 和 1 in.
C_v 1.95



BS(H)10, 15
1 和 1 1/2 in.
C_v 3.84, 7.3



LBS4
1/2 in.
C_v 1.3



BD(H)10
1 in.
C_v 3.84



BD(H)15
1 1/2 in.
C_v 7.3

储罐压力控制:

减压型和背压型
针对选定系列, 进口和控制压力
达 232 psig (16 bar) 。



TBRS4
1/2 in.
C_v 0.32



TBRS(H)8
1 in.



TBRS16
2 in.



TBVS4
1/2 in.
C_v 0.32



TBVS8
1 in.

特种调压阀

PRSTC4, 8
进口压力和控制范围达
232 psig (16 bar)
1/2 和 1 in.
C_v 0.70, 1.95



HPRS4
进口压力和控制范围达
507 psig (35 bar)
1/2 in.
C_v 0.45

