# UNIFORM STATUTORY DECLARATION FORM FOR THE REGISTRATION OF FITTING DESIGNS

NEW BRUNSWICK	
NUNAVUT	

NOVA SCOTIA YUKON PRINCE EDWARD ISLAND NORTHWEST TERRITDRIES


NEWFDUNDLAND AND LABRADOR

MANUFACTURERS NAME: Swagelok Company	
MANUFACTURERS ADDRESS: 29500 Solon Road, Solon, Ohio 44139-34	10.2
PLANT LOCATIONS: Headquarters: 29500 Solon Road, Solon, Ohio 441	39-3492
CATEGORY OF FITTINGS TO BE REGISTERED, CIRCLE ONE CATEGO	
<ul> <li>A Pipe fittings, including couplings, tees, elbows, Ys, plugs, unions, pipe caps, or redu</li> <li>B Flanges: all flanges</li> <li>C Valves: all line valves</li> <li>D Expansion joints, flexible connections, and hose assemblies: all types</li> <li>E Strainers, filters, separators, and steam traps</li> <li>F Measuring devices, including pressure gauges, level gauges, sight glasses, levels, or pressure transmitters</li> <li>G Certified capacity-rated pressure relief devices acceptable as primary over pressure boilers, pressure vessels, piping and fusible plugs</li> <li>H Pressure retaining components that do not fail into one of the above categories</li> </ul>	protection on
N Nuclear components: Class 1 Class 2 Class 3 D, (Meeting AECB or ASME SHOW MANUFACTURERS NAME, TRADEMARK, OR LOGO AS IT WILL APPEAR (	
Swagelok	FDRGED D WELOED D WROUGHT D CAST D OTHER D DESCRIBE OTHER:
LIST OF SUPPORTING DOCUMENTATION AND IDENTIFICATION OF THE ACTUA	L ITEMS TO BE REGISTERED
responsibility for the quality of the end product do solemnly declare that the ir my knowledge represents the product for which registration is sought. The di temperature ratings, and identification markings are in accordance with the he manufacture of these fittings is regulated by a Quality Control Program which or in part and has been verified by <u>OMI</u> as to declaration conscientiously believing it to be true, and knowing that it is of the Signature of Declarer:	mensions, materials of construction, pressure arein named standards. I further deciare that the extends to each plant where fabrication occurs in whole being suitable for that purpose and I make this solemn a same force and effect as if made under oath.
Declared before me at <u>Solon Min</u>	USETHIS SPACE
This <u>215+</u> day of <u>MICCI</u> AD <u>2014</u> Commissioner of Oaths or Notary Public: (sign) <u>Let and</u> <u>Republicual Sector</u> (Commission (Affix Official seal to the right) This space for Regulatory Aut This registration must be revaildated after ten (10) y	Portage Co. North Co. Nouveau - Manual hority use Brunis V. Read - Manual hority
CRN: 0H12871.5 REV1	BOILER & PRESSURE VESSEL ACT
FID#: <u>1214</u>	REGISTRATION ONLY
<ul> <li>Notes:</li> <li>1 All fittings shall be registered in the name of the Manufacturer.</li> <li>2. Each category shall be supported with two Statutory Declaration forms and one copy of supporting documentation.</li> <li>3. The declaration shall be made by the person having full authority and responsibility for the quality of the end product.</li> <li>4. Quality control programs shall be resubmitted for validation at a maximum interval of five (5) years.</li> </ul>	CRN OFA 21 +1. 5 + Keul EXAMINER: for CHIEF BOILER INSPECTOR DATE: 3/6/2015

## Attachment A. Scope of Registration for Swagelok Thermowells (Category H)

This document represents the scope of Swagelok Thermowells covered by this CRN approval. These thermowells have been evaluated in accordance with ASME B31.3 and ASME B&PV Code Section VIII Division 1.

### Product Description

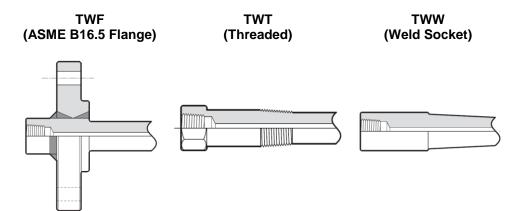

#### Summary Table

Series	Port Connections and	Material	Maximum Exte	ernal Pressure	Design Code of	
	Series	Sizes	Sizes	wateria	Up to 70° F	At Maximum Temperature
TWF		1 in. ASME class 150	304 SS (ASTM A479) (ASTM A182)	275 psig	20 psig @ 1000°F	
	2 in. ASME class 150	316 SS (ASTM A479) (ASTM A182)	275 psig	20 psig @ 1000°F		
	1 in. ASME class 300 1 ½ in. ASME class 300 2 in. ASME class 300	304 SS (ASTM A479) (ASTM A182)	720 psig	40 psig @ 1000°F	ASME B31.3 and	
		316 SS (ASTM A479) (ASTM A182)	720 psig	40 psig @ 1000°F		
TWT (reduced shank)	½ in. male NPT	304 SS (ASTM A479)	6300 psig	3300 psig @ 1000°F	B&PV Code Section VIII Div.1	
	¾ in. male NPT	316 SS (ASTM A479)	6300 psig	3500 psig @ 1000°F		
TWT (tapered shank)			304 SS (ASTM A479)	6300 psig	3300 psig @ 1000°F	
	¾ in. male NPT	316 SS (ASTM A479)	6300 psig	3500 psig @ 1000°F		
TWW	τ\Λ/\Λ/	304 SS 3⁄4 in. pipe (ASTM A479)	⅔ in. pipe	6400 psig	4400 psig @ 1000°F	
	1 in. pipe	316 SS (ASTM A479)	6500 psig	2900 psig @ 1000°F		

#### Product Options:

Additional options and non-pressure boundary alterations that do not affect the pressure-temperature ratings may be made available within the scope of this approval. Examples of these include the following:

- Variable stem lengths
- G1/2B instrument connection
- Stainless steel cap and chain

#### **Quality System**

The Swagelok Company quality system complies with the requirements of BS EN ISO 9001:2008. The Swagelok Company maintains British Standards Institution Certificate of Registration Number FM 01729, which applies to all locations listed on the Certificate.

#### **References**

The product catalog does not represent the full scope of the registration but rather details some of the most common options.

Temperature Measurement Devices, Bimetal Thermometers and Thermowells, Product Catalog MS-02-353 R2