UNIFORM STATUTORY DECLARATION FORM FOR THE REGISTRATION OF FITTING DESIGNS

NEW BRUNSWICK
NUNAVUT

at a maximum interval of five (5) years.

NOVA SCOTIA YUKON

PRINCE EDWARD ISLAND NORTHWEST TERRITORIES NEWFOUNDLAND AND LABRADOR

	I ERRITORIES
MANUFACTURERS NAME: Swagelok Company	
MANUFACTURERS ADDRESS: 29500 Solon Road Solon Oblo 441	30 2402
CANT LOCATIONS: Headquarters: 29500 Solon Road, Solon, Ohlo	39-3492
CATEGORY OF FITTINGS TO BE RECISTERED. CIRCLE ONE CA	
A Pice filtings, Including couplings, tees, elbows, Ys, plugs, unions, pipe caps, 3 Flanges: ell flanges 3 Flanges: ell flanges 3 Valves: ell line valves 5 Expansion joints, flaxible connections, and hose assemblies: ell types 5 Strainers, filtors, separators, and stoam trape 6 Measuring devices, including pressure gauges, level gauges, sight glasses, in pressure transmitters 7 Certified capacity-rated pressure relial devices acceptable as primary over problems, pressure vanaels, piping and fusible plugs 8 Pressure reteining components that do not fall into one of the above categorist Nuclear components; Class 1 Class 2 Class 3 C, (Meating AECB or HOW MANUFACTURERS NAME, TRADEMARK, OR LOGO AS IT WILL API	ASME B31.3 Chapter IX, for unlisted components where applicable avels, or recours protection on eas ASME requirements)
Swagelok	FORGED WELDED WROUGHT & CAST O STREET O STREET O STREET;
IST OF SUPPORTING DOCUMENTATION AND IDENTIFICATION OF THE Attachment A. Attachment B. Support Documents, Catalog Information	ACTUAL ITEMS TO BE REGISTERED:
ECLARATION:	
y knowledge represents the product for which registration is equipit. In product relings, and identification merkings are in accordance with manufacture of these fittings is regulated by a Quality Control Program of Insperi should be presented by The Brinish Standards Institution equation conscientiously believing the product to be true, and knowing that it is ignature of partiare. It is the product of Control of the Public Commission of Control	The dimensions, materials of construction, pressure that the herein named standards. I further declare that the which extends to each plant where fabrication occurs in whole as being suitable for that purpose and I make this sciemn of the same force and effect as if made under oath. The Little ETHIS SPACE FOR THE at Periogo County OFFICIAL SEAL The Periogo County OFFICIAL SEAL The Expires: 03/09/2019
This space for Regulato	O Authority use
This registration must be revalidated after tan-	(10) years from the date of eccentance.
CRN: <u>0.018171_5</u> FID#: <u>1214</u>	ACCEPTED PROVINCE OF PRINCE EDWARD ISLAND COMMUNITIES, LAND & ENVIRONMENT
Notes: 1. All fittings shall be registered in the name of the Manufacturer. 2. Each category shall be supported with two Statutory Declaration forms and one copy of supporting documentation. 3. The declaration shall be made by the person having full authority and reasonability for the purity of the person having full authority and	DATE: Muh 30//C
responsibility for the quality of the end product. 4. Quality control programs shall be resubmitted for validation	INSPECTION SERVICES SECTION

BOILER/PERSSURE VESSEL BRANCH

Attachment B1: Scope of CRN Registration for Swagelok IPT Series Check Valves (Category C)

This document represents the scope of the Swagelok IPT Series Check Valve covered by this submission for CRN approval. The Swagelok IPT Series Check Valves were designed and evaluated in accordance with ASME B31.3 Chapter IX, for unlisted components where applicable.

Summary Table

Product Description or Series	Main Pressure Bearing Component	Main Pressure Bearing Material (Standard)	Port Connections and Sizes	Maximum Rated Pressure		Design Code
				At ambient temperature	At maximum temperature	of Construction
CV (soft seat)	Body	ASTM A479	Female NPT 1/4", 3/8", 1/2"	15,000 @ 100F	14,700 @ 250F	ASME B31.3 Chapter IX (For Unlisted Components Where Applicable)
CV (dual seat)	Body	ASTM A479	Female NPT 1/4", 3/8", 1/2"	15,000 @ 100F	14,700 @ 250F	
CV (ball seat)	Body	ASTM A479	Female NPT 1/4", 3/8", 1/2"	15,000 @ 100F	13,900 @ 650F	
CV (soft seat)	Body	ASTM A479	Female NPT 3/4", 1"	10,000 @ 100F	9,800 @ 250F	
CV (dual seat)	Body	ASTM A479	Female NPT 3/4", 1"	10,000 @ 100F	9,800 @ 250F	
CV (ball seat)	Body	ASTM A479	Female NPT 3/4", 1"	10,000 @ 100F	9,300 @ 650F	
CV (soft seat)	Body	ASTM A479	Cone-and-Thread (medium) 1/4", 3/8", 9/16", 3/4", 1"	20,000 @ 100F	19,600 @ 250F	
CV (dual seat)	Body	ASTM A479	Cone-and-Thread (medium) 1/4", 3/8", 9/16", 3/4", 1"	20,000 @ 100F	19,200 @ 250F	
CV (ball seat)	Body	ASTM A479	Cone-and-Thread (medium) 1/4", 3/8", 9/16", 3/4", 1"	20,000 @ 100F	18,600 @ 650F	

Product Illustration



Typical Product Characteristics

Some product options could affect the pressure-temperature ratings shown in the Summary Table, but in all cases the ratings are less than those shown in the Summary Table. An example of this would be optional body seal materials.

Additional options that do not affect pressure-temperature ratings may be made available within the scope of this registration. An example of this would be different poppet springs.

Quality System

The Swagelok Company quality system complies with the requirements of BS EN ISO 9001:2008. In support of this, Swagelok Company maintains British Standards Institution Certificate of Registration Number FM 01729 and HSB Registration Services Certificate of Registration Number HQ-Q-4, which apply to all locations listed on the certificate.

References

The product catalog does not represent the full scope of registration, but rather details some of the most common options.

Medium and High Pressure Valves, Fittings and Tubing Catalog MS-02-472




Attachment B2: Scope of CRN Registration for Swagelok IPT Series Double Block and Bleed Valves (Category C)

This document represents the scope of the Swagelok IPT Series Double Block and Bleed Valve covered by this submission for CRN approval. The Swagelok IPT Series Double Block and Bleed Valves were designed and evaluated in accordance with ASME B31.3 Chapter IX, for unlisted components where applicable.

Summary Table

Product Description or Series	Main Pressure Bearing Component	Main Pressure Bearing Material (Standard)	Port Connections and Sizes	Maximum Rated Pressure		
				At ambient temperatur e	At maximum temperatur e	Design Code of Construction
DB (ball-needle-ball)	Body	ASTM A479	Female NPT 1/4", 3/8", 1/2"	15,000 @ 100F	14,700 @ 250F	ASME B31.3 Chapter IX (For Unlisted Components Where Applicable)
DB (needle-needle- needle)	Body	ASTM A479	Female NPT 1/4", 3/8", 1/2"	15,000 @ 100F	14,700 @ 250F	
DB (ball-needle-ball)	Body	ASTM A479	Cone-and-Thread (medium) 1/4", 3/8", 9/16"	15,000 @ 100F	14,700 @ 250F	
DB (needle-needle- needle)	Body	ASTM A479	Cone-and-Thread (medium) 1/4", 3/8", 9/16"	20,000 @ 100F	19,600 @ 250F	

Product Illustration

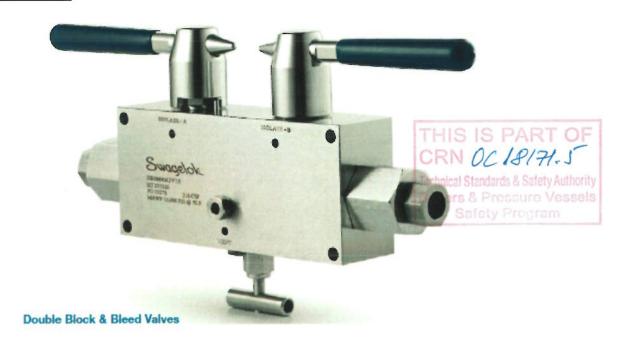

Typical Product Characteristics

Some product options could affect the pressure-temperature ratings shown in the Summary Table, but in all cases the ratings are less than those shown in the Summary Table. An example of this would be optional body seal materials.

Additional options that do not affect pressure-temperature ratings may be made available within the scope of this registration. An example of this would be different handles.

Quality System

The Swagelok Company quality system complies with the requirements of BS EN ISO 9001:2008. In support of this, Swagelok Company maintains British Standards Institution Certificate of Registration Number FM 01729 and HSB Registration Services Certificate of Registration Number HQ-Q-4, which apply to all locations listed on the certificate.

References

The product catalog does not represent the full scope of registration, but rather details some of the most common options.

Medium and High Pressure Valves, Fittings and Tubing Catalog MS-02-249



Attachment B3: Scope of CRN Registration for Swagelok IPT Series Needle Valves (Category C)

This document represents the scope of the Swagelok IPT Series Needle Valve covered by this submission for CRN approval. The Swagelok IPT Series Needle Valves were designed and evaluated in accordance with ASME B31.3 Chapter IX, for unlisted components where applicable.

Summary Table

		Main Pressure Bearing Material (Standard)	Port Connections and Sizes	Maximum Rated Pressure		Design Code
	Bearing Component			At ambient temperature	At maximum temperature	Construction
NVT	Body	ASTM A479	Female NPT 1/4", 3/8", 1/2"	15,000 @ 100F	14,700 @ 250F	ASME B31.3 Chapter IX (For Unlisted Components Where Applicable)
NVT	Body	ASTM A479	Female NPT 3/4", 1"	10,000 @ 100F	9,800 @ 250F	
NVT	Body	ASTM A479	Cone-and-Thread (medium) 1/4", 3/8", 9/16"	30,000 @ 100F	29,400 @ 250F	

Product Illustration





Typical Product Characteristics

Some product options could affect the pressure-temperature ratings shown in the Summary Table, but in all cases the ratings are less than those shown in the Summary Table. An example of this would be optional body seal materials.

Additional options that do not affect pressure-temperature ratings may be made available within the scope of this registration. An example of this would be different handles.

Quality System

The Swagelok Company quality system complies with the requirements of BS EN ISO 9001:2008. In support of this, Swagelok Company maintains British Standards Institution Certificate of Registration Number FM 01729 and HSB Registration Services Certificate of Registration Number HQ-Q-4, which apply to all locations listed on the certificate.

References

The product catalog does not represent the full scope of registration, but rather details some of the most common options.

Medium and High Pressure Valves, Fittings and Tubing Catalog MS-02-249

