# UNIFORM STATUTORY DECLARATION FORM FOR THE REGISTRATION OF FITTING DESIGNS

NEW BRUNSWICK NUNAVUT NOVA SCOTIA YUKON PRINCE EDWARD ISLAND NORTHWEST TERRITORIES

NEWFOUNDLAND AND LABRADOR

MANUFACTURERS NAME: Swagelok Company					
MANUFACTURERS ADDRESS: 29500 Solon Road, Solon, Ohio 44139 USA					
PLANT LOCATIONS: Headquarters: 29500 Solon Road, Solon, Ohio 44139 USA (See Atta	John Market AV				
CATEGORY OF FITTINGS TO BE REGISTERED, CIRCLE ONE CATEGORY ONLY	THE OF THE STANDARD OF CONSTRUCTION				
A Pipa fittings, including couplings, taes, allows, Ys, plugs, unions, pipa caps, or reducers B Flanges: all flanges C Valves: all line valves D Expansion joints, flexible connections, and hose essemblies: all types E Strainers, filters, separators, and steam trape F Measuring devices, including pressure gauges, level gauges, sight glasses, levels, or pressure transmitters G Certified capacity-retaid pressure relief devices acceptable as primary over pressure protection on bollers, pressure vessets, piping and fusible plugs H Pressure retaining components that do not full into one of the above categories	ASME 831.3 Chapter IX, for unlisted components where applicable				
N Nuclear components: Class 1 🗆 Class 2 🗀 Class 3 🗇, (Mediting AECB or ASME requirements)	]				
SHOW MANUFACTURERS NAME, TRADEMARK, OR LOGO AS IT WILL APPEAR ON THE PRODUCT	Typic and an in-				
Swagelok	TYPE OF CONSTRUCTION  FORGED CI WELDED CI WROUGHT (CAST CI OTHER CI DESCRIBE OTHER				
LIST OF SUPPORTING DOCUMENTATION AND IDENTIFICATION OF THE ACTUAL ITEMS TO BE RE					
ISO 9001:2008 Quality System Certificate, Sales Drawings and other Support Documents, Atta Items to be registered: 1/2 inch SAE/MS to 1/2 inch and 3/4 Inch tube adapter fittings, 1/2 in inch tube fittings	ch SAE/MS to 1/2 Inch and 3/4				
my knowledge represents the product for which registration is sought. The dimensions, material temperature ratings, and identification markings are in accordance with the herein named stands manufacture of these fittings is regulated by a Quality Control Program which extends to each plan part and has been verified by BSI  as being suitable for the declaration conscientiously balleving it to be true, and knowing that it is of the same force and extended to each plan in the same force and extended to e	s of construction, pressure ards. I further declare that the ant where fabrication occurs in whole				
Signature of Declarer:					
Declared before me at:    Solon   Mile   Solon   Mile   OFF	さら、 では、私日が発送された。				
This space for Regulatory Authority use	WAS THE RESIDENCE OF THE PARTY				
This registration must be reveiled after ten (10) years from the determinance					
CRN: 0A18544.5	Herioted annuality				
FID#: 1214	Barvice NL				
Notes:  1. All fittings shall be registered in the name of the Magnifecturer	to 16/07/22				
forms and one copy of supporting documentation.  3. The declaration shall be made by the person having full authority and responsibility for the quality of the end product.  4. Quality control programs shall be resubmitted for validation at a maximum interval of five (5) years.	UNDER THE AUTHORITY BY THE PUBLIC SAFERY ACT AND SEE PRESSURE VESSEL AND CONTRESSED GAS REGULATIONS				

# Attachment B. Scope of Registration for Swagelok Tube Fittings to SAE MS Ends (Category A)

# **Product Scope**

This document represents the scope of Swagelok 1/2" and 3/4" Tube Fittings with 1/2" Medium Pressure SAE/MS ends, covered by this submission for CRN approval. The Medium Pressure Fittings have been evaluated in accordance with ASME B31.3 for unlisted components and ASME B31.1 for unlisted components.


#### **Summary Tables**

Product Description or Series	Material	Port Connections and Sizes	Maximum Allowable Working Pressure		Design Code of
			Ambient temperature	At maximum temperature	Construction
Tube fitting*	316 Stainless Steel (ASTM A479)	Tube Fitting, Tube Adapter 1/2"	6,700 PSI	5,092 PSI @ 1000°F	ASME B31.3 (Unlisted Components)
		Tube Fitting, Tube Adapter 3/4"	5,800 PSI	4,408 PSI @ 1000°F	ASME B31.1 (Listed Components)

<sup>\*</sup> Note: 1/2" SAE MS port connection rated at 9,137 psi at ambient temperature according to SAE J1926-2, Rev. MAR2010. The tube fitting port connections are thus considered the limiting factor.

#### **Product Description**

Swagelok SAE / MS Medium Pressure Fittings coupled with the tube fittings identified above are furnished as straight shaped fittings. Swagelok Tube Fittings consist of at least one Swagelok End – a proprietary two-ferrule mechanical-grip design.

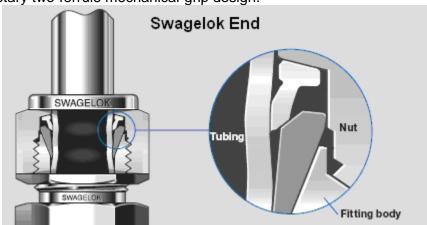

# **Quality System**

The Swagelok Company quality system complies with the requirements of BS EN ISO 9001:2008. Swagelok Company maintains BSI Certificate of Registration Number FM 01729, which applies to all locations listed on the Certificate.

### References

The product catalogs do not represent the full scope of registration, but rather details some of the most common options.

- Medium and High Pressure Valves, Fittings and Tubing Catalog MS-02-472
- Gaugeable Tube Fittings and Adapter Fittings MS-01-140
- Tubing Data Sheet MS-01-107